


PLANK 138 14 mm Clic

Technical information:

| | | |
|---|--|------------------------|
| Produced according to: | European parquet norm EN 13489 - 2002 | |
| Dimension: | 14 x 138 x 2200 mm | |
| Toplayer: | about 3.5 mm | |
| Construction: | 3-layer construction; Hardwood toplayer, middlelayer and bottomlayer made of spruce Toplayer about 3.5 mm Middlelayer 8.8 mm Bottomlayer 1.7 mm | |
| Boards / m² per carton: | 10/ 3.04 | |
| Cartons/ m² per pallet: | 42/ 127.68 | |
| Slotted top layers per carton/ minimum length (mm) | 2/ 600 | |
| Weight per carton/ pallet in kg: | 24/ 1008 | |
| Fire behavior ¹⁾: | Cfl-s1 and Dfl-s1 depending on wood specie and surface treatment | |
| Content of formaldehyd ²⁾: | E1 | |
| Content of pentachlorphenol (PCP) ²⁾: | not detectable | |
| Density kg/ m³ ²⁾: | about 600 | |
| Antislip performance: | Live Satin | USRV 11 ²⁾ |
| | Live Matt | USRV 26 ²⁾ |
| | Live Natural | USRV 40 ²⁾ |
| Abrasion resistance: | Live Satin | 70/ 1100 ³⁾ |
| | Live Satin | 100 ⁴⁾ |
| Thermal conductivity ²⁾: | 0.15 W/ mK | |
| Areal thermal resistance ⁵⁾: | 0.093 m ² K/ W | |

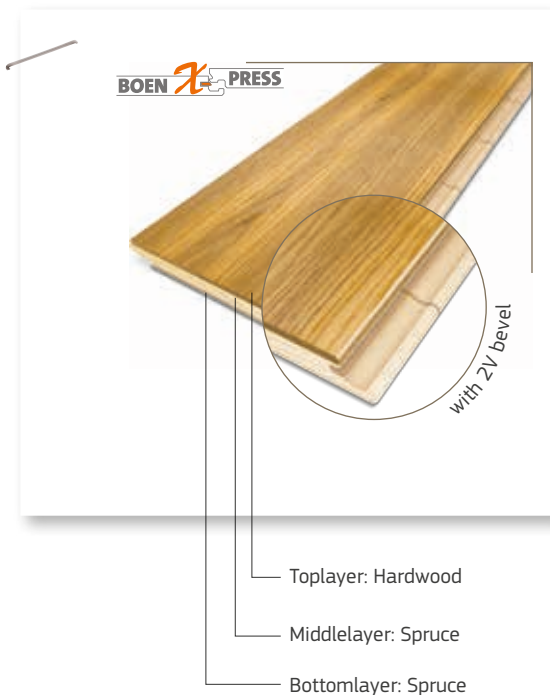

DOP 4658-1.1-07.2013



Emissionsgeprüftes Bauprodukt nach DIBt-Grundsätzen.

1) according to DIN EN 13501-1, 2) according to DIN 14342, 3) according to ENV 13696, 4) according to DIN 68861, 5) according to EN 12524